



Intertek Intertek

Undercounter Refrigerators



| Model | Size |
|---------|----------|
| UR27-HC | 27" Unit |
| UR48-HC | 48" Unit |
| UR61-HC | 61" Unit |
| UR72-HC | 72" Unit |

STANDARD FEATURES

- Solid state thermostat with digital display
- Stainless steel front & sides
- Self closing doors remain open past 90°
- Environmentally friendly R600A
- EZ slide out condenser
- Whisper quiet
- Solid construction
- Full length integrated door handle
- Casters with two front brakes
- Cool air intake
- 2" clearance back and sides

*Not suitable for installation in a non-commercial or residential applications.


| Items | Description | Items | Description | | | |
|---------------------------------|-----------------------------|----------------------|--|--|--|--|
| Front, top & sides | Stainless steel | Temperature control | Solid state thermostat/Digital display | | | |
| Doors | Stainless steel / ABS liner | Approvals | ETL Listed Capillary tube | | | |
| External back | Aluminum | Refrigerating system | | | | |
| Cabinet interior | ABS | Refrigerant | R600A | | | |
| Interior floor | Stainless steel | Temperature range | 34°F to 38°F | | | |
| Insulation | Polyurethane (CFC free) | Evaporator | Powder coated aluminum/copper | | | |
| Shelves Heavy duty, PVC coating | | Condensing unit | Rear mounted | | | |

CONFORMS TO NSF/ANSI STD 7





DETAILS AND DIMENSIONS

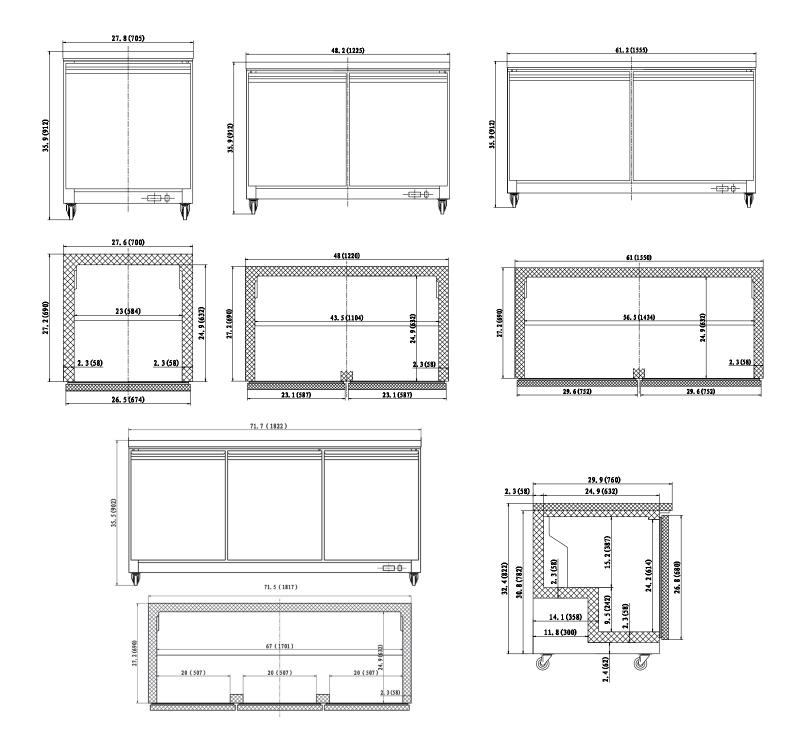

| | Model | Doors | Shelves | Cabin L | et Dim (in D | iches) H | HP | Voltage | Amps | NEMA Plug | Cord Length | Crated Weight |
|---|---------|-------|---------|------------|-----------------|-------------|-----|----------|------|--------------|----------------|------------------|
| | UR27-HC | 1 | 1 | 27.8 | 31.0 | 35.4 | 3/8 | 115/60/1 | 1.5 | 5-15P | 10 | 243 |
| | UR48-HC | 2 | 2 | 48.2 | 31.0 | 35.4 | 3/8 | 115/60/1 | 3.0 | 5-15P | 10 | 300 |
| | UR61-HC | 2 | 2 | 61.2 | 31.0 | 35.4 | 3/8 | 115/60/1 | 3.0 | 5-15P | 10 | 330 |
| [| UR72-HC | 3 | 3 | 71.7 | 29.9 | 39.4 | 3/8 | 115/60/1 | 3.5 | 5-15P | 10 | 380 |